

The Best Choice



Main strengths: Hygienizing Biocell

Consistent quality

The machine's electronic control system ensures hygienisation of the material through a pasteurization process.



Financial savings

By balancing the savings obtained from using hygienized solids in the place of traditional bedding (straw, sand, sawdust, etc.) it can easily be verified that returns on the investment are achieved within a few years.



Easy to use

The machine is simple to assemble (install) and easy to use thanks to its "user friendly" control system.



Option of remote control

It is possible to control the operation of the machine from an office PC (temperature, weight, unloaded material, alarms history, etc.).



Improved and more economic management of manure

The quantity of manure to be managed is reduced since traditional bedding materials are not present.

Low energy consumption

Maximum power consumption 6,5 kW.

Additional storage is not required

The hygienized solid material is produced daily and so additional storage is not required (in barns) as is the case with traditional bedding materials.



Very compact size

The overall dimensions of the machine are very small compared to competing systems.



Easy to transport

The machine is modular and so a 20 foot container is sufficient for transport.



Hygienizing Biocell



Manure



Liquid fraction

Hygienized solid




Operating performance:

- Production: up to 8 t/day of hygienized solids.
- Hygienisation: guaranteed pasteurization system (1 hour at 70°C).
- Drying: up to 55% of dry material (by adjustment of the HRT).

Process:

The process of biodrying or biostabilization occurs inside the HBC biocell: the presence of oxygen (air) supports an aerobic process of biological degradation of the organic substances present in cow manure. The process is highly exothermic and the resulting heat production is used to ensure the hygienisation of the product and to evaporate the water content. The exothermic biological process means that the material remains at a temperature of 70°C for at least 60 minutes, ensuring pasteurization.

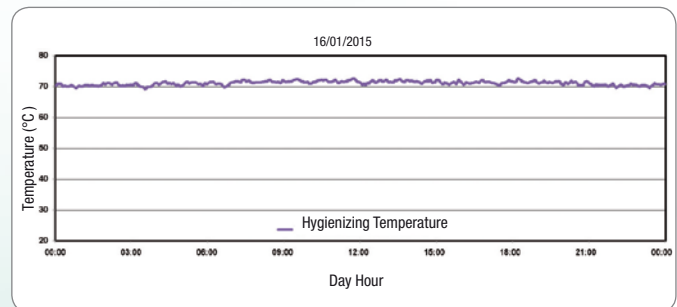


Quality of hygienized solid⁽¹⁾:

Escherichia coli

Limit value 1.000 MPN/g according to


- Animal by-products after pasteurization (Legislative Decree n. 75/2010).
- Freely marketable organic fertilizers (Reg. UE 142/2011).

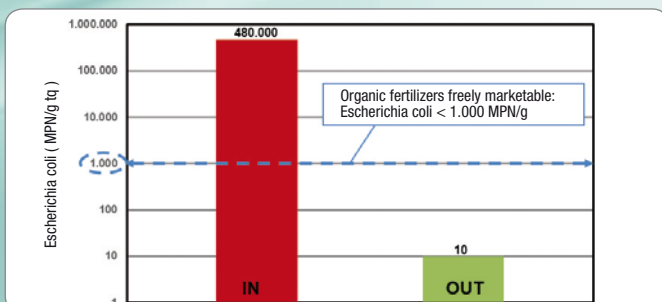

Total Bacterial Count TBC

In Europe there are not official limits for TBC.

As only indicative information, the limit value for raw milk is 100.000 UFC/ml.

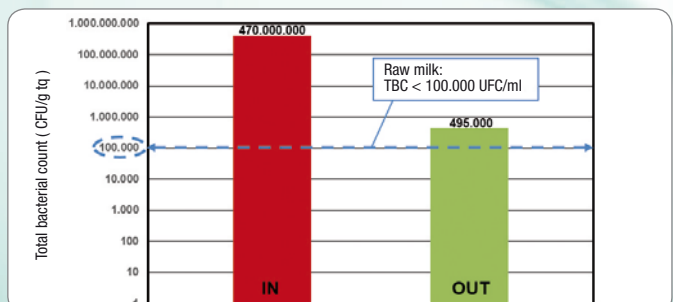

(1) Analyses relating to Laboratory tests. Absence of salmonella.




Hygienizing Biocell




Check on video

Technical features:

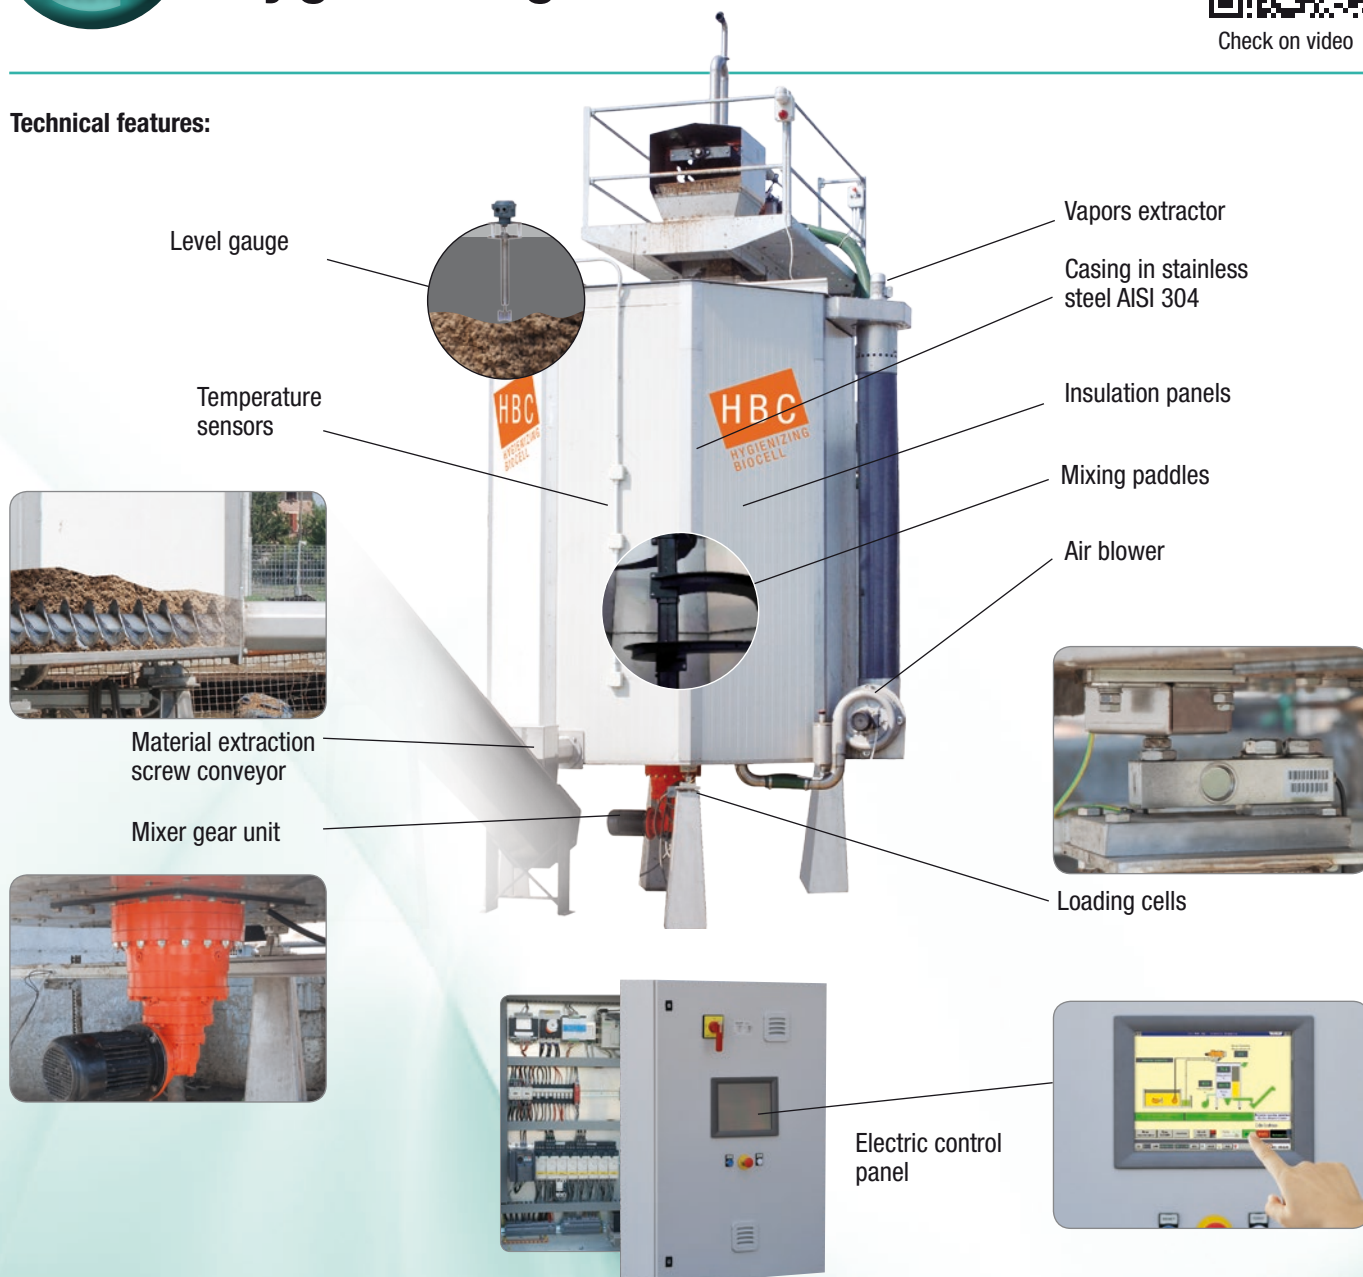

Operational functioning of the software:

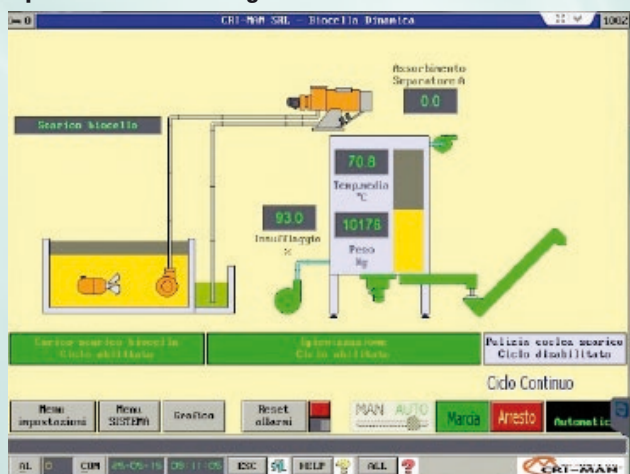

- Biomass temperature.
- Biomass weight.



- Air blower adjustment.
- Constant monitoring of unloaded material: Hygienisation.
- Full system management: mixer, pump, separator.